

Yuvo Tech+ Specifications

Model	Mahindra YUVO TECH+ 265DI 24.27kW (33 HP)	Mahindra YUVO TECH+ 275DI 27.6 kW (37 HP)	Mahindra YUVO TECH+ 405DI 29.1 kW (39 HP)	Mahindra YUVO TECH+ 415DI 31.3 kW (42 HP)	Mahindra YUVO TECH+ 475DI 32.8 kW (44 HP)	Mahindra YUVO TECH+ 575DI 35 kW (47 HP)	Mahindra YUVO TECH+ 585DI 36.75 kW (49.3 HP)
Number of cylinders	3	3	3	3	4	4	4
Engine Torque (Nm)	139	146	170	183	185	192	197
Max PTO Power kW (HP)	22.2(29.7)	25 (33.5)	26.5 (35.5)	28.7 (38.5)	30.2 (40.5)	32.1 (43.1)	33.9 (45.4)
Rated RPM (r/min)	2000	2100	2000	2000	2000	2000	2100
Steering	Power Steering	Power Steering	Power Steering	Power Steering	Power Steering	Power Steering	Power Steering
Transmission	Full Constant Mesh	Full Constant Mesh	Full Constant Mesh	Full Constant Mesh	Full Constant Mesh	Full Constant Mesh	Full Constant Mesh
Ground Speed (km/h) (F & R)	F 1.46 - 30.63 R 1.96 - 10.64	F 1.40 - 30.67 R 1.88 - 10.64	F 1.46 - 30.63 R 1.96 - 10.63	F 1.46 - 30.63 R 1.96 - 10.63	F 1.46 - 30.63 R 1.96 - 10.63	F 1.53 - 32.14 R 2.05 - 11.15	F 1.47 - 32.17 R 1.97 - 11.16
Number of gears	12 F + 3 R	12 F + 3 R	12 F + 3 R	12 F + 3 R	12 F + 3 R	12 F + 3 R	12 F + 3 R
Clutch	Single	Single/Dual	Single/Dual	Single/Dual	Single/Dual	Single/Dual	Single/Dual
Hydraulic Pump Flow@Rated (l/min)	29	30	29	29	29	29	30
Hydraulics lifting capacity(kg)	2000*	2000*	2000*	2000*	2000*	2000*	2000*
Front tyre	153 x 407 mm (6 x 16)	153 x 407 mm (6 x 16)	153 x 407 mm (6 x 16)	153 x 407 mm (6 x 16)	153 x 407 mm (6 x 16)	191 x 407 mm (7.5 x 16)	191 x 407 mm (7.5 x 16)
Rear tyre	346 x 711 mm (13.6 x 28)	346 x 711 mm (13.6 x 28)	346 x 711 mm (13.6 x 28)	346 x 711 mm (13.6 x 28)	346 x 711 mm (13.6 x 28)	379 x 711 mm (14.9 x 28)	379 x 711 mm (14.9 x 28)

* Features may vary from model to model. The accessories and implements shown are not a part of the tractor. Specifications may change from time to time. With weight lifting capacity adjustment.

Available options 2WD | 4WD With High Lug Tyres | SLIPTO | Auxiliary Valve

Factory fitment available Tipping Trailer Pipe With Qdc Coupler | Front Bumper | Rear Tow Hook

MAHINDRA TRACTORS

Mahindra & Mahindra Ltd., Farm Equipment Sector, Farm Division, AFS Headquarters, Mahindra Towers, 1st Floor, Akurli Road, Kandivali (E), Mumbai - 400101, India. Tel: 28849588, Fax: 28465813.

Toll Free No: 1800 2100 700 | <https://www.mahindractor.com> | YouTube: <https://www.youtube.com/mahindractorofficial>

Facebook: <https://www.facebook.com/MahindraTractorsIndia> | Instagram: <https://www.instagram.com/mahindractorofficial>

Twitter: <https://twitter.com/TractorMahindra>

mahindra ^{Rise}

Mahindra Yuvo Tech+
Now with more **+** points

mahindra
TRACTORS
TOUGH HARDUM



MSPTO
12 SPEED & 6 SPEED
PTO Speed Option

2000⁺ kg
Lifting Capacity

Stabilizer Bar
For Adjustment Of
Heavy Equipment In
Muddy Conditions
(Available in 475, 575, 585)


**Longer
Top Link**

**Water
Separator**
Increases
Engine Life

DIGI SENSE 4G
Get information
about your tractor
at all times


No. 1 In Warranty
★★★★★
6 YEARS
WARRANTY
(CONDITIONS APPLY)

A tractor that does wonders both inside and outside the field with Multi Speed PTO (MSPTO)

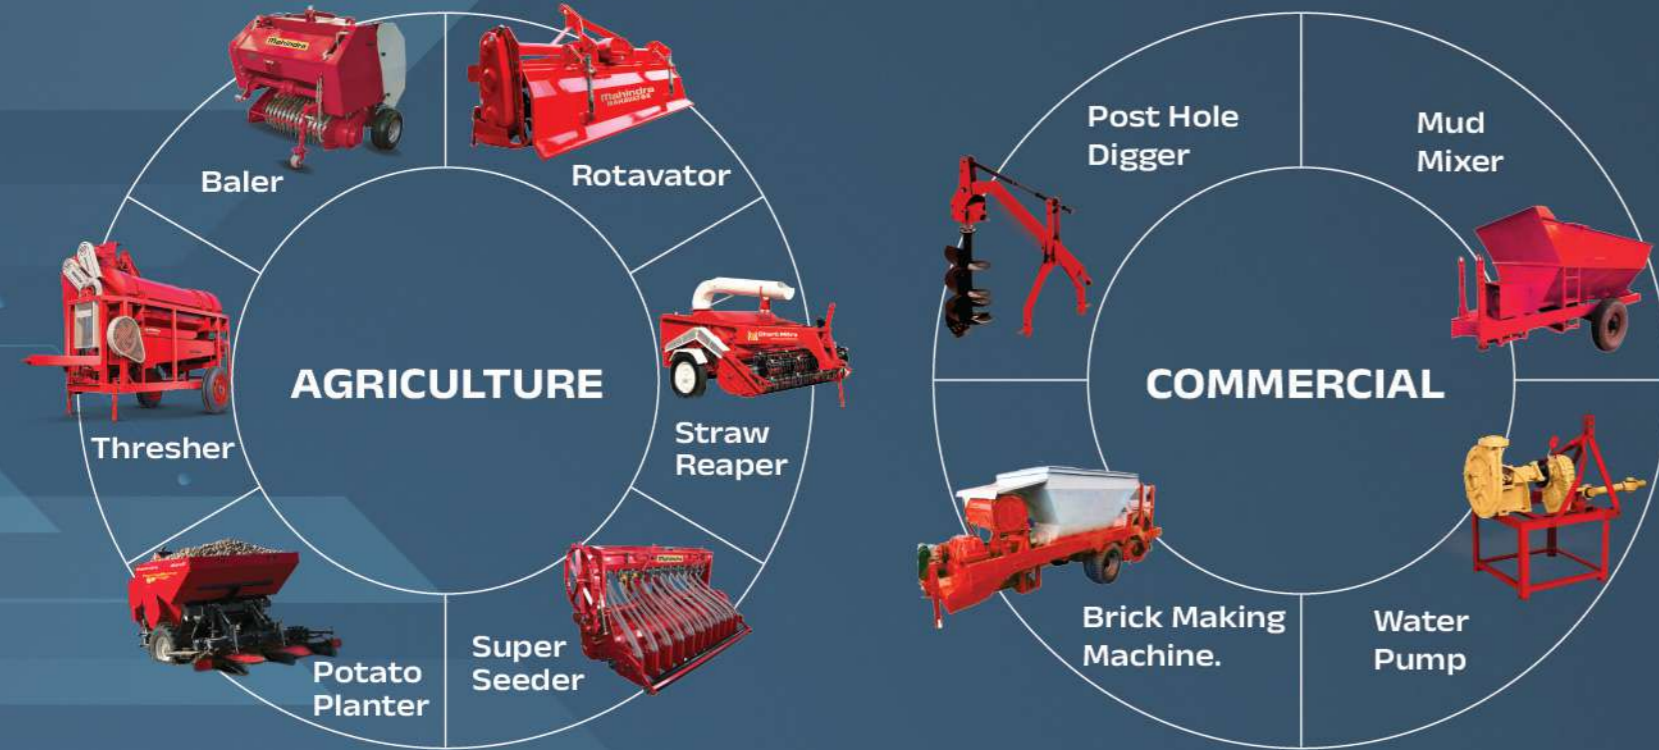

CLUTCH	NEW MSPTO OFFERING	Yuvo Tech+ Range						
		265	275	405	415	475	575	585
SINGLE	6 Speeds: 540 and more 1 reverse and 4 forward speeds	✓	✓	✓	✓	✓	✓	✓
DUAL	6 Speeds: 540 and more 1 reverse and 4 forward speeds		✓	✓	✓	✓	✓	
	12 speeds: 540, 540E and more 2 reverse and 8 forward speeds	✓	✓	✓	✓	✓	✓	✓

Now With **+** More Points



MSPTO -
First time in this category – with 12 speed and 6 speed option

- 540 & Reverse
- 540, 540E & Reverse



Digisense

- Farmer's third eye
- Get information about your tractor at all times

EQL Button

- Easily raise or lower the implement



(Available in 575, 585)

Higher Ground Clearance in 4WD

- Increases productivity on any type of soil



Water separator

- Increases the life of fuel Pump

2000*Kg Hydraulics lifting capacity (with adjustment)

- Lifts heavy implements with ease



Stabilizer Bar

- For adjustment of heavy equipment in muddy conditions

The Longer Length Of The Top Link

- Should Match The Lower Link Perfectly.